

Thrust 16:

Demonstrate and understand sustained high beta confinement at reduced aspect ratio

Nikolai Gorelenkov (PPPL), Chris Hegna (UWis), Bick Hooper (LLNL), Hantao Ji (PPPL), Mike Kotschenreuther (UT), Dick Majeski (PPPL), Jon Menard (PPPL), Richard Milroy (UWash), Martin Peng (ORNL), Steve Sabbagh (Columbia U), Aaron Sontag (ORNL), Vlad Soukhanovskii (LLNL), Dan Stutman (JHU)

Research thrust is designed to achieve the ST goal in the ITER era

GOAL: *Establish the ST knowledge base to be ready to construct a low aspect ratio fusion component testing facility that provides high heat flux, neutron flux, and duty factor needed to inform the design of a demonstration fusion power plant*

⇒ Aggressively pursue improvements to advance a low-A device for energy production

Elements of thrust aim to:


- ◆ Leverage extensive knowledge-base of higher-A tokamak
- ◆ Extend understanding to unique high- β + low ν regime
- ◆ Advance ST as reduced size and cost configuration for fusion

Elements of the reduced aspect ratio thrust

- 16.1 - Develop plasma startup, rampup with low or no transformer flux
- 16.2 - Develop a plasma-material interface at high heat flux, high temperature , and low density in the ST
- 16.3 - Deploy liquid metals, especially lithium, as PFCs in the ST
- 16.4 - Understand electron, fast/thermal ion confinement in high β , low ν ST plasmas
- 16.5 - Understand stability, develop steady-state control of high β ST plasmas
- 16.6 - Develop normally-conducting radiation-tolerant magnets
- 16.7 - Demonstrate integrated, continuous high β , broad current profile ST plasmas
- 16.8 - Explore linkages with compact tori
- 16.9 - Evaluate the RFP at low aspect ratio, with maximized bootstrap current

16.1 Develop plasma startup and ramp-up with no or very low transformer flux

- ◆ **Develop reliable plasma initiation and growth schemes**
 - Establish science basis for helicity injection
 - » Current limiting mechanisms, resulting plasma characteristics
 - Implement EBW/ECH/ECCD coupling to startup plasma
- ◆ **Demonstrate ramp-up to full current**
 - Effective coupling to RF/NBI
- ◆ **Develop predictive modeling capability**
 - Validate transport-based CD modeling against ST database
 - » Effects of fast-particle transport on NBCD
- ◆ **Assess feasibility of central induction**
 - MIC & retractable solenoid technology
 - Modeling & engineering assessment of iron-core
- ◆ **Demonstrate integrated test at ST-CTF relevant level of performance**
 - Similar transport regime, magnetic field, I_p , etc.

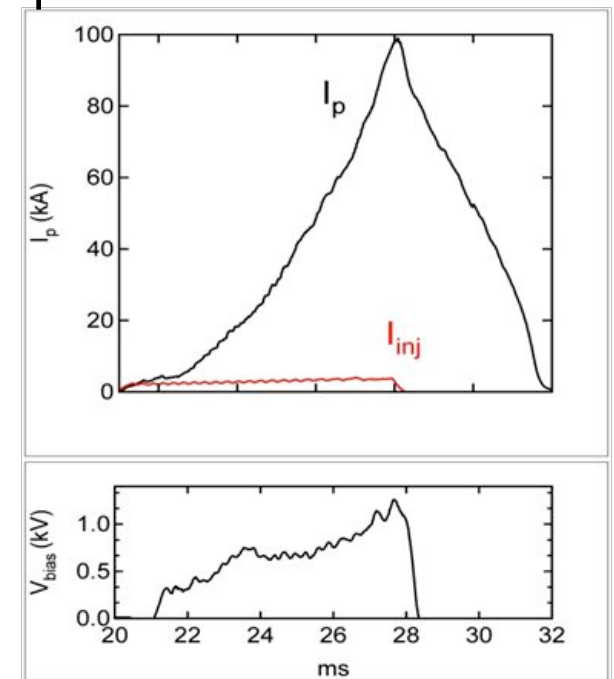

*Non-solenoidal startup with
HI and PF induction*

16.2 Demonstrate and understand a viable plasma-material interface at high heat flux and low density

Compact geometry drives need for high power handling PFCs


- ◆ Develop divertor and wall power reduction and handling solutions
 - Innovative divertors, flux expansion, stochastic edge
 - Divertor targets: liquid metals, moving “pebbles” as PFCs
 - Develop edge transport and turbulence models for predictive capability
 - ◆ Reduce divertor heat flux from 20-60 MW/m² to <10 MW/m²
 - Transient loads to <0.5 MJ/m²
 - Nuclear environment, long pulse
 - ◆ Develop particle control for continuous, low density H-mode operation
 - Cryo-pumping and/or liquid metals for impurity, helium, density control
 - Achieve steady-state $n_e/n_G \sim 0.2-0.3$
 - ◆ Demonstrate integration with high-performance pedestal and core high- β plasma in upgraded and scaled ST configurations
- ⇒ ST presents the opportunity to push to higher neutron wall loading
- ⇒ Common to other compact alternates (spheromak, FRC, RFP)

Deploy liquid metal, especially lithium, PFCs in the ST

Integration of PMI, confinement in the ST

- ◆ Implement full liquid lithium wall in an ST, with NB core fueling
 - Does performance continuously improve in the ST as recycling is reduced?
- ◆ Implement a full liquid lithium divertor in an ST, with core fueling
 - Is a low recycling *divertor* sufficient?
 - Characterize PMI, transport in a low recycling ST
- ◆ Validate models for the core, edge, and PMI, for arbitrary global recycling
 - Determine optimum global recycling coefficient for the ST
- ◆ Construct an “optimized”, reduced recycling liquid metal-walled DD ST

Electron confinement improves with reduced recycling - NSTX

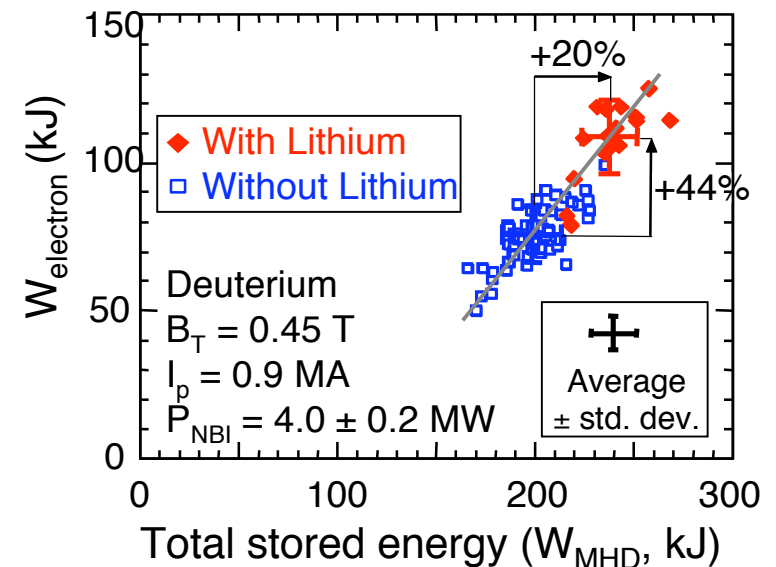


⇒ST provides rapid, cost-effective test of flowing liquid metal PFCs discussed in Thrust 11


16.4 Understand electron and fast/thermal ion confinement in high β , low ν ST plasmas

- ◆ Does stronger B_T , ν scaling of τ_E in present STs lead to improved fusion performance at low-A?
 - ◆ Study transport in upgraded (x2) and new (x4) STs (near term focus: electrons)
 - ◆ Measure high and low-k EM turbulence (n.t. focus: ETG 'streamers'+ μ -tearing islands)
 - ◆ Develop predictive understanding (models+control)
-
- ◆ Will large population of super-Alfvenic energetic particles affect heating/current drive in a ST reactor?
 - ◆ Study EP transport over extended range of ρ^* (n.t. focus: intermediate ρ^*)
 - ◆ Study EP interaction with background plasma via AEs (n.t. focus: ion heating/alpha channeling, electron transport)

B_T scaling of τ_E in NSTX

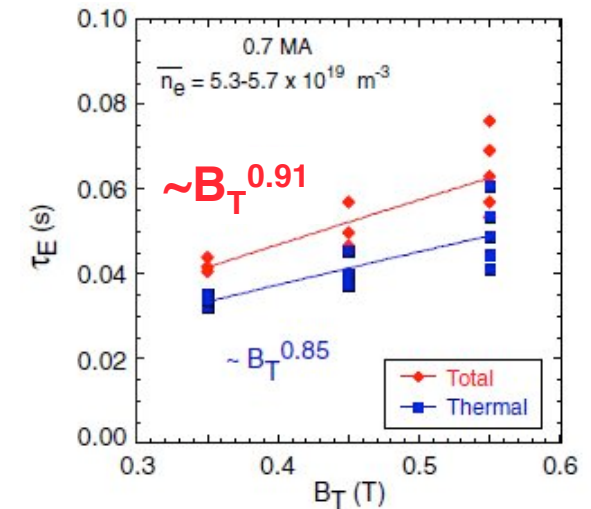

Modeling of Alfvén eigenmode - induced electron transport

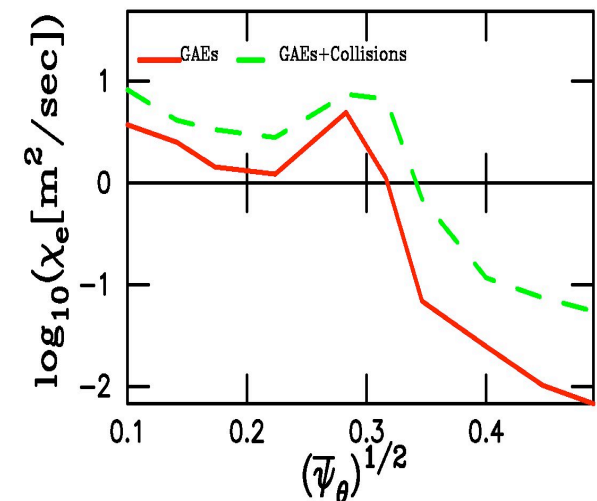

16.5 Understand stability and develop control of low I_j , high β ST plasmas



- ◆ Achieve, understand global mode stability near low I_j current-driven kink limit, over full range of β_N , with controlled broad pressure, V_ϕ profiles
 - Steady-state current profiles; near-burning plasma conditions
- ◆ Explore/validate key stability science for low A at reduced collisionality (\sim order of magnitude; near burning plasma levels), at increased field
 - Extend capability to alter V_ϕ and shear (e.g. expanded NBI, 3-D fields)
 - Understand stability at intermediate V_ϕ ; effects of V_ϕ shear on NTMs
 - Characterize disruptions at low A and I_j
- ◆ Demonstrate/study high β_N with minimal disruptivity, transients using multiple controls - compatible with a high neutron fluence environment
 - RWM and ELM control, $q_0 > 2$ for NTM control

\Rightarrow Operate continuous high β_N beyond CTF ($\beta_N > 5.8$), approaching ST-DEMO levels ($\beta_N > 7$), with flexible controls

Develop normally-conducting radiation-tolerant magnets

- ◆ Design, evaluate single-turn centerpost magnet
 - Evaluate candidate multiturn designs
 - Develop matching low impedance power supplies
 - ◆ Construct, test candidate TF magnet + PS
 - High field (2-3T); ~10 sec. pulse
 - ◆ Design, test radiation-tolerant OH solenoids
 - **Backup** for noninductive approach
 - ◆ Implement a testing program for radiation tolerance
 - DPA limits, tritium migration, joints, electrical, mechanical degradation
- ⇒ Thrust element can provide the core of a high field, moderate pulse-length ST

ST-CTF Example

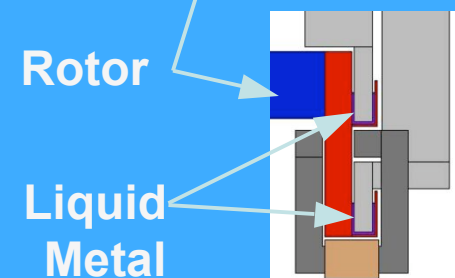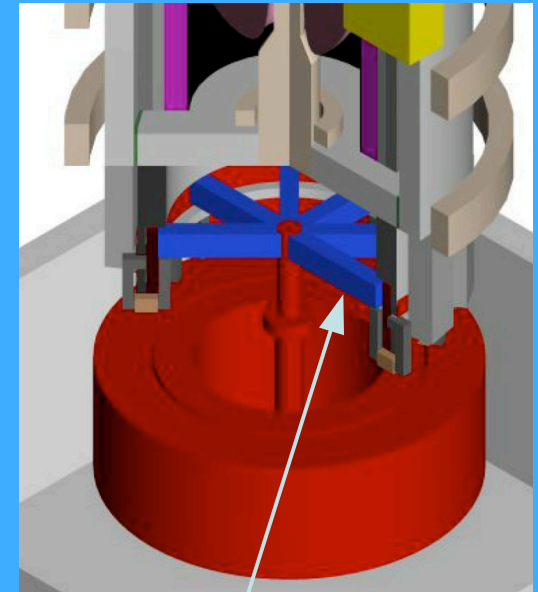



16.7 Achieve and understand integrated, continuous high beta, low collisionality, broad current profile ST plasmas

- ◆ Reduce collisionality 1 - 2 orders of magnitude at high beta
 - Toroidal field, current, heating power increase by $\sim 2 - 4\times$
 - Pumping to reduce recycling, density, collisionality
 - ⇒ **Assess impact on ST transport and stability**
- ◆ 100% sustained non-inductive current-drive, at $\geq 50\%$ bootstrap
 - Non-inductive ramp-up to MA, or multi-MA, level in the ST
 - ⇒ **Control of core safety factor profile; optimize stability, confinement**
- ◆ Mitigate steady-state, high heat and particle exhaust in the ST
- ◆ Increase plasma pulse length by 1 - 3 orders of magnitude
 - Control fully-non-inductive ST for many current relaxation times
 - Develop disruption avoidance, mitigation for integrated ST conditions

⇒ **Sustained high performance with
equilibrated first-wall conditions**


16.8 Extend low aspect-ratio science and technology – Compact Tori

- ◆ CTs have near unity aspect ratio
 - Vanishingly small linked poloidal flux outside the last-closed flux surface
 - Removal of center column leads to a cylindrical vacuum chamber
- ◆ Actions that overlap with STs include:
 - Expand further the application of Helicity Injection from spheromak to ST (Element 16.1)
 - Understand divertor configurations at ultra-low aspect ratio. (Element 16.2)
 - Compare the effects of plasma facing liquid metals in the 3 configurations. (Element 16.3)
 - Understand electron energy transport in a spheromak ($q < 1$) and compare with ST ($q > 1$) (Element 16.4)

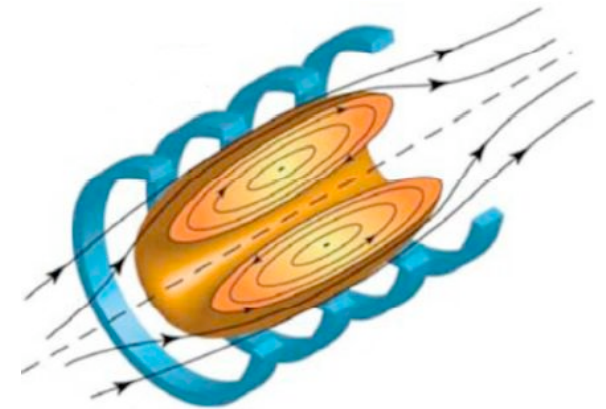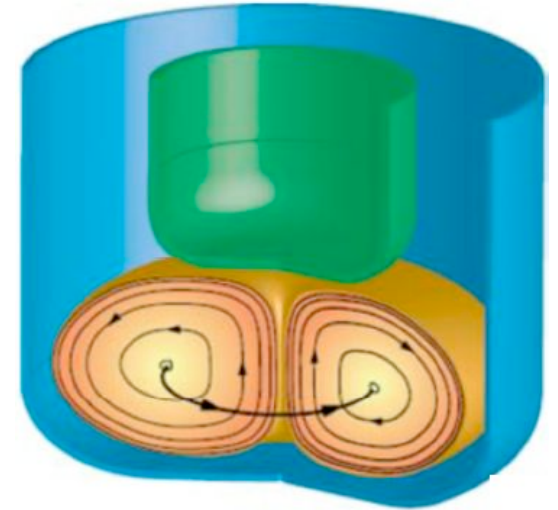


Evaluate RFP stability and confinement at low-A

- ◆ Motivation: potential benefits at low-A
 - bootstrap current increase at high beta,
 - Less stochasticity due to laminar relaxation
 - ease in generating single-helicity states.
 - ◆ Actions:
 - theoretically assess RFP equilibrium, stability, and transport at low aspect ratio
 - experimentally explore low-A RFP physics by collaborating with a Japanese device and by extending small STs to RFP regimes
 - inform the optimum choice of aspect ratio (geometry) of the next-step advanced-PoP RFP device
- ⇒ Common physics with ST and spheromak
- Helical deformation connects with the stellarator

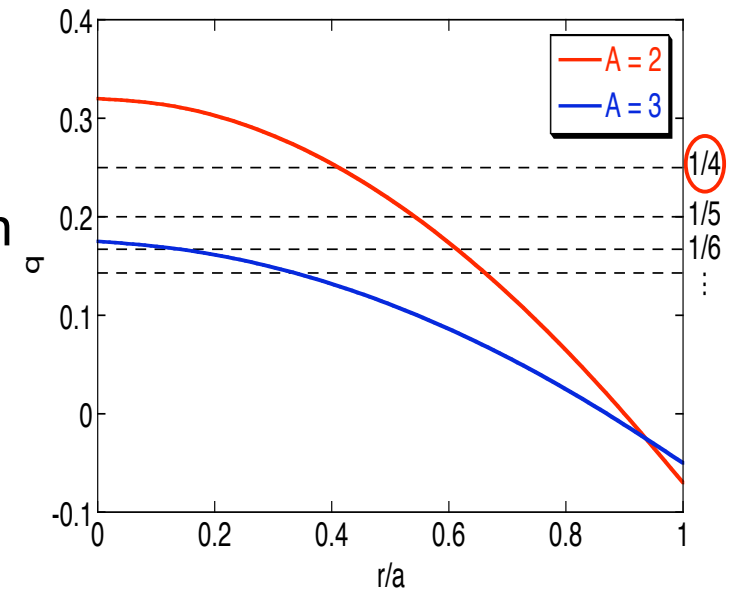

ST thrust goal: nuclear testing, applications

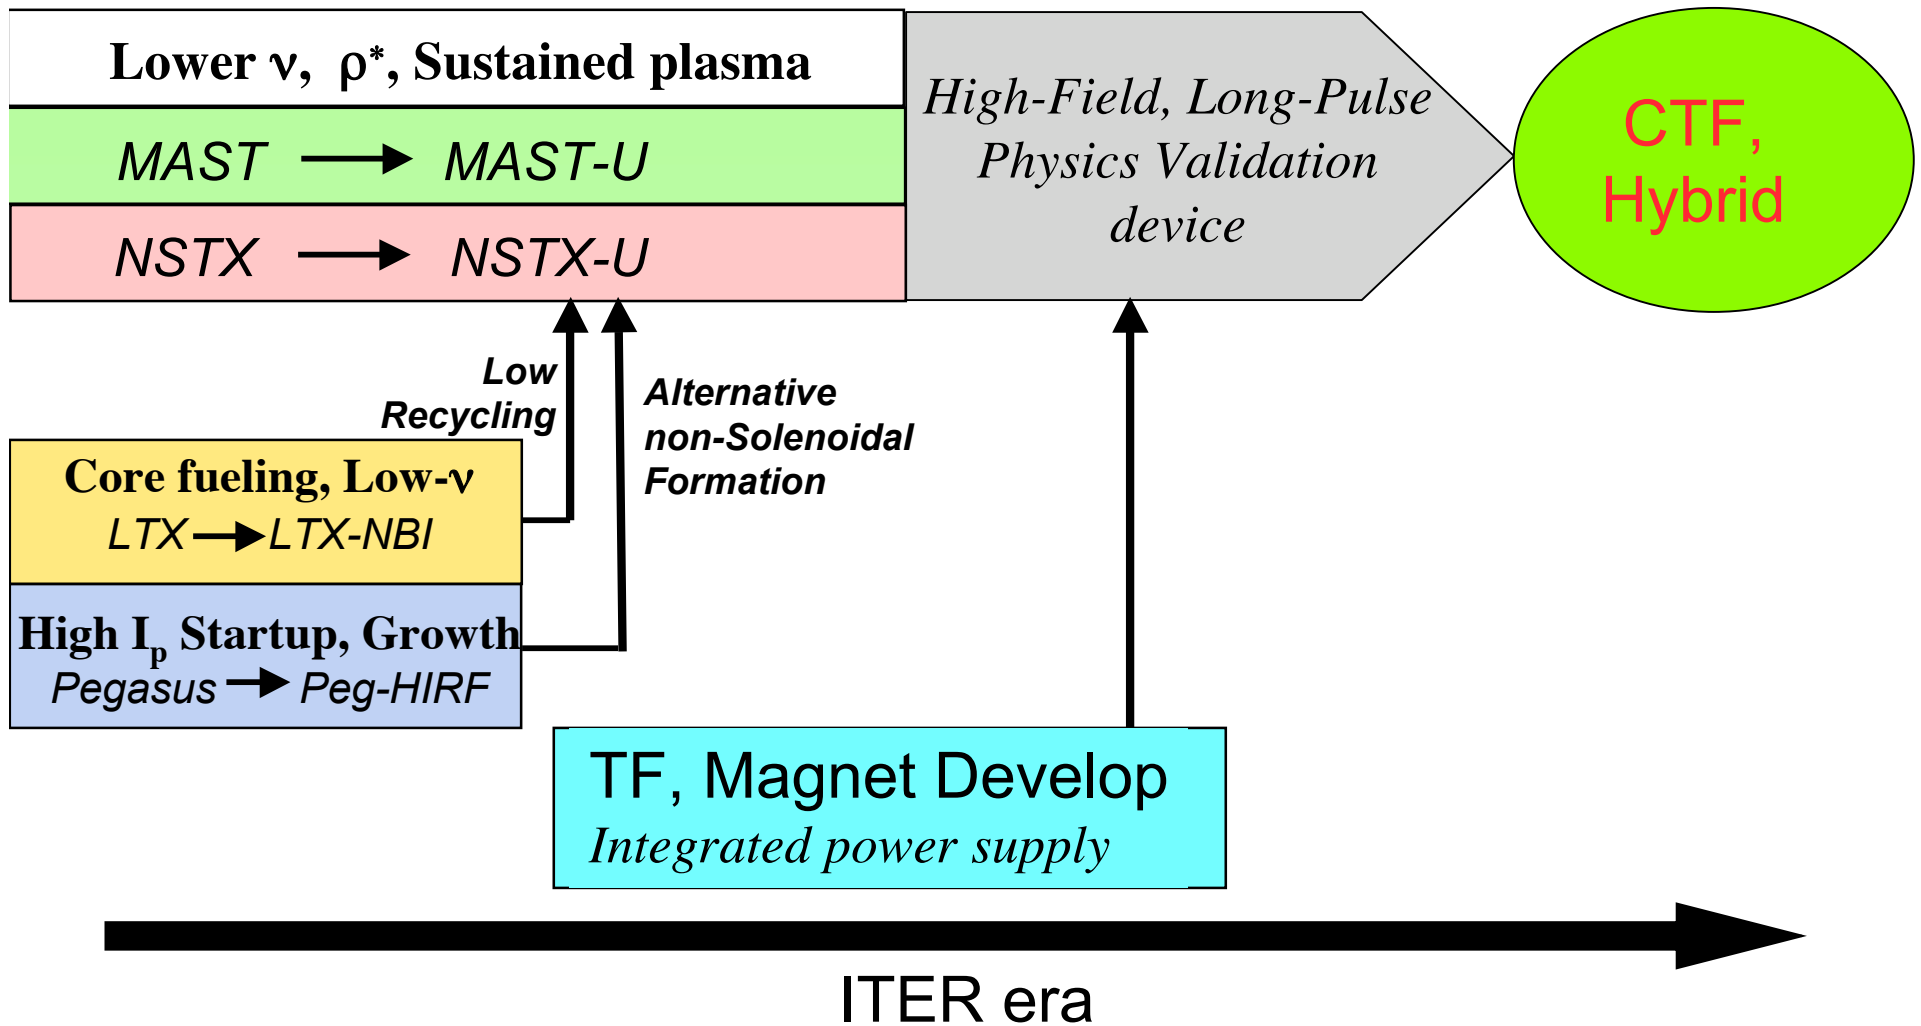

- ◆ Exploit synergies with the AT, stellarator, RFP, CT...